

COAX diECi

DCX 690 180 Watt

Technical Specifications

Component	3W Coaxial	
Size	mm	Woofer 6"x9" Midrange 60mm (2"1/2") Tweeter 15mm (19/32")
Power Handling (Watt)	peak continuous program	180 90
Impedance	Ohm	4
Frequency response	Hz	45-22k
Sensitivity	dB/SPL	95
Outer diameter	mm	165
Mounting hole diameter	mm	152
Magnet size	mm	80
Total depth	mm	85
Mounting depth	mm	76
Weight of one component	kg	0,959
Voice coil diameter	mm	25


Electro-Acoustic Parameters

D	mm	171
Xmax	mm	3
Re	ohm	3,2
Fs	Hz	50
Le	mH@1kHz	0,52
Le	mH@10kHz	0,04
Vas	lit	37,20
Mms	gr	15,5
Cms	mm/N	0,66
BL	T-m	4,11
Qts		0,82
Qes		0,91
Qms		8,76
Spl (1m/2,83V)	dB	95



- 1 Low carbon content plates for maximum magnetic permeability and high heat dissipation.
- 2 Large motor assembly for mobile voice coil control.
- 3 Pure copper voice coil, wound on paper former, for maximum lightness.
- 4 Water-repellent treated paper cone.
- 5 DIN size basket protected by abrasion-proof and anticorrosive paint.
- 6 Gold-plated, high current terminals.
- 7 Silver-plated lead wires for maximum reliability and conductivity.
- 8 Foam surround, glued with heat-resistant adhesive.
- 9 Butyl rubber protective ring, against crashes and abrasions.
- 10 Epoxy glue for basket and motor system perfect coupling.
- 11 60 mm paper midrange with ferrite magnet.
- 12 Neodymium tweeter with Mylar dome, for compactness and energy at high frequencies.

*Grille included

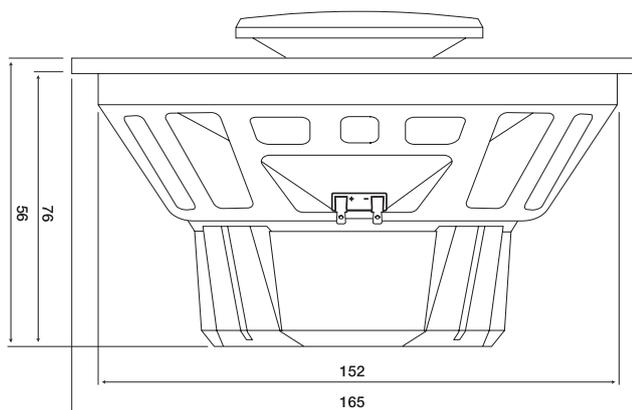

dieci

The Dieci Line represents a new performance landmark in its category. Hertz aimed at obtaining high efficiency, maximum tonal quality and high grade tonal accuracy.

The speaker cones and voice coil formers are made of a special natural paper mixture. Foam surrounds and cotton spiders ensure mechanical reliability and optimal control even under high excursion conditions. The large motor allows tight control of the loudspeaker moving assembly for tight, dynamic output.

The Dieci line is the perfect speaker choice for factory OEM upgrades, direct head power or with high quality amplifiers.

Start the right way: with the first step into the Hertz world.

Thanks to the inverted phase plug and to the very light Mylar membrane, the **DT 16 TWEETER** manages to have the same technical and acoustical benefits of a conventional dome membrane component.

Compact **SIZE**



DIECI WOOFER cone is totally new: the pressed paper V-cone ensures maximum linearity and wide sound dispersion.

DIECI WOOFERS were designed for easy installations in OEM factory speaker locations and are optimized for unique acoustics found in the automotive environment.



The low-loss crossovers, provided with the coaxial and component systems, do not alter the original musical signal, always providing clear, powerful, undistorted sound.

DIECI COAX are provided with Neodimium magnet tweeter featuring built-in crossover for bursting dynamics and DIN size gasket for an easy installation in whatever factory locations.



DIECI SUBWOOFERS provide very high efficiency, as well as superior power handling. The pure copper voice coils are wound on aluminium formers, providing good thermal and mechanical capacity. The vented hole on the bottom plate allows better thermal dissipation and linear excursion.



The **DBX 250** enclosure is made of multi-layer laminated Plywood. The Xponential Flanged Duct ensures maximum linearity of the airflow, providing tight, dynamic bass. The angled rear wall allows easy installation and ensures diffusion of the rear wave for resonance-free performance.

